

Incineration kilns




Parque Tecnológico de Reciclado PTR, parcela 36
Ctra. de Valmadrid, km. 2 · La Cartuja Baja
50720 · Zaragoza · SPAIN
tel: +34 976 470 940 · fax: +34 976 471 595
info@kalfrisa.com · www.kalfrisa.com

THE VALUE OF EXPERIENCE



MODEL	WIDTH	LENGTH	CHAMBER HEIGHT	TOTAL HEIGHT	CHAMBER LENGTH	Ø CHAMBER	Ø POSTCOMBUSTOR	Ø STACK	WEIGHT	DESTRUCTION CAPACITY*
KT-750	1.950	2.280	1.600	5.123	1.300	850	1.048	648	7.000	65 kg/h
KT-1.500	2.380	3.430	1.600	6.123	2.264	900	1.048	648	8.500	90 kg/h
KT-3.000	2.510	3.000	2.100	6.900	2.150	1.450	1.198	648	14.000	150 kg/h
KT-5.000	2.720	3.220	2.250	7.100	2.670	1.600	1.250	910	17.000	250 kg/h

* Destruction capacity refers to solid waste with 2.500 kcal/kg of calorific power

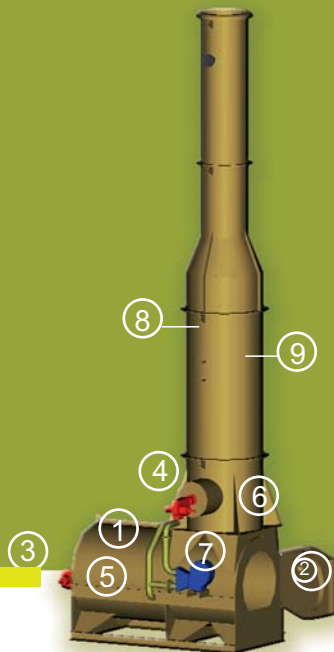

- ① Combustion chamber
- ② Loading door
- ③ Combustion burner
- ④ Postcombustion burner
- ⑤ Combustion air collector
- ⑥ Postcombustion air collector
- ⑦ Fan
- ⑧ Temperature measuring probe
- ⑨ Thermal reactor (postcombustor)

Incineration is a rapid and efficient way to destroy waste in maximum hygienic conditions and environmental respect.

■ **EASY HANDLING**

The kilns have two chambers with their correspondent burner.

■ **HIGHLY RELIABLE**

The independent air control for each chamber assures an economical incineration and transparent and odourless gases.

■ **LOW MAINTENANCE COSTS**

On demand, incinerators can include liquid waste destruction devices.

Utilization:

Biosanitary waste
Animals
Urban waste
Industrial waste

■ **TOTALY
 TRANSPARENT
 AND ODOURLESS
 GASES**

NATURAL GAS/PROPANE/FUEL OIL

www.kalfrisa.com

